

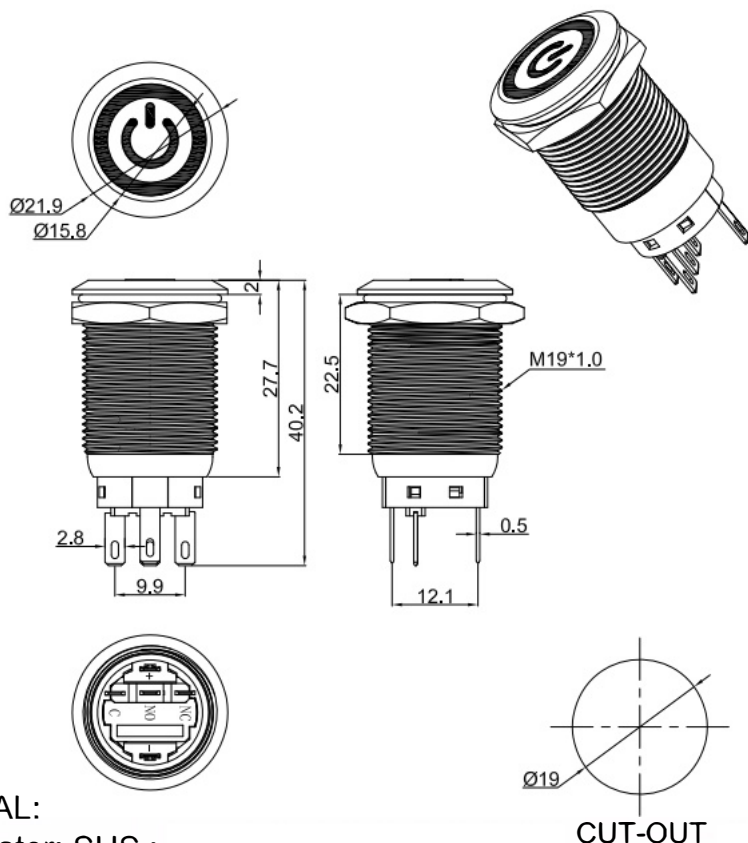


PBM19



Switch Specifications

Rating: 5A 250VAC ;
2A 36VDC ;
Degree of protection: IP67;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength: 1500VAC For 1 minute ;
Total Travel: 3.0±0.5mm ;
Operating Force: 500±200gf ;
Mechanical Life: 200,000 cycles ;
Load Life: 50,000 cycles ;
Operating Temperature: -20° C ~ 85° C ;
Function: OFF-ON



Panel Thickness: 10mm MAX.

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Bottom Base: PBT, UL rated: 94V-0 Min. ;
Terminal: Brass, Silver or Gold plated ;
Nut: Brass, Ni plated .

LED Specifications

LED 类型	双向LED灯珠（交直流通用）			W6	蓝色	2.8	3.0	3.4	15
寿 命	40000小时（参考值）			G3	纯绿色	2.8	3.0	3.4	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	Y2	黄色	1.8	2.0	2.4	15
	AC/DC36V	AC/DC48V	AC/DC220V	R2	红色	1.8	2.0	2.4	15
额定电流	约15mA		约3mA	灯发光颜色 X Emitted color X	最小	一般	最大	额定 电压 (V)	额定 电流 (mA)
降压方式	采用3V灯，需内置电阻								

公差 TOLERANCES				.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.			
视角 VIEWING ANGLE	比例尺 SCALE	日期 DATE	2021.11.05	核 准	核 对	绘 图	2021.11.05	品 名 TITLE		图 号	
A0	New Issue	2021.11.05	N/A	Richard	Sinc	Mashaofei		PBM19-13Z-F-PXX-S0-S		DRAWING NO	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY		PBM19-13Z-F-PXX-S0-S_CP_A0			